


POWERWIRE LIFT FRAME

520 / 770-ton wireline lift frame systems for ultra-deepwater work – supporting electric line and slickline operations with a compact rig-floor footprint and improved safety, transportability, and efficiency.

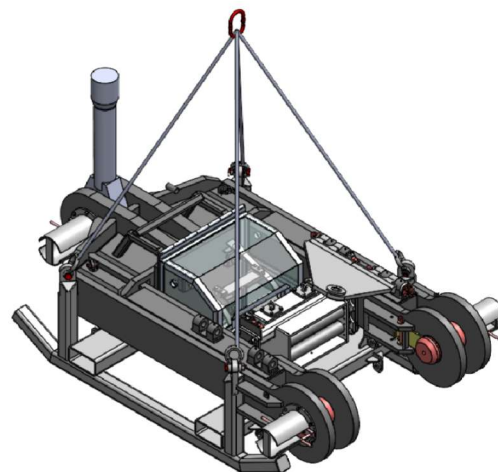

LIFT MODE

520 / 770 Ton

RATED SYSTEMS

10K / 15K lb.

HOIST OPTIONS

40,000 lb.

E-FRAME CAPACITY

6-5/8" - 5-1/2"

LIFT SUB OPTIONS

API 8C / DNV

COMPLIANCE

KEY FEATURES

520 / 770-ton rated systems

Combined product family covering both 520-ton and 770-ton lift frame options.

E-line & slickline compatible

E-frame swing arms support both slickline and electric line operations.

Rig-floor control

Compact control stand provides improved control of lift speed from the rig floor.

Hydraulic hoist options


Available with 10,000 lb. and 15,000 lb. hydraulic hoist configurations.

Safety-focused design

Dropped-objects tested with attached safety pins and protected smaller components.

Transport mode

Easily converts from lift mode to transport mode for movement and staging.

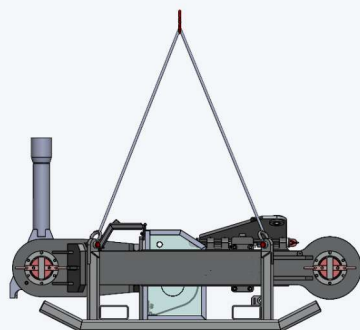

LIFT MODE ⇌ TRANSPORT MODE


The frame converts quickly between lift and transport configurations, simplifying movement, staging, and rig-up while minimizing interference with ongoing operations.

AVAILABLE CONFIGURATIONS

RATED SYSTEM	520 ton / 770 ton
DIMENSIONS	12.30' L x 8.40' W x 3.11' H
GROSS WEIGHT	21,000 lbs.
BAIL-TO-BAIL CENTER WINDOW	4.58' W
LIFT SUB OPTIONS	6-5/8" / 5-7/8" / 5-1/2"
HYDRAULIC HOIST	10,000 lbs. / 15,000 lbs.
COMPATIBILITY	Electric line and slickline
TRANSPORT	Converts from lift mode to transport mode
APPROVALS / TESTING	DNV and ABS approved; dropped-objects tested
COMPLIANCE	Class 1 Division 1 • D.V.2 compliant

OPERATION & SAFETY FOCUS

- 1 Lift frame connects with an interchangeable pivoting / articulating lift sub.
- 2 Rotating E-frame swing arms support slickline and E-line operations.
- 3 Hydraulic hoist provides controlled lifting with anti-two-block protection.
- 4 Basket, safety pins, and dropped-objects testing support safer rig-floor operations.

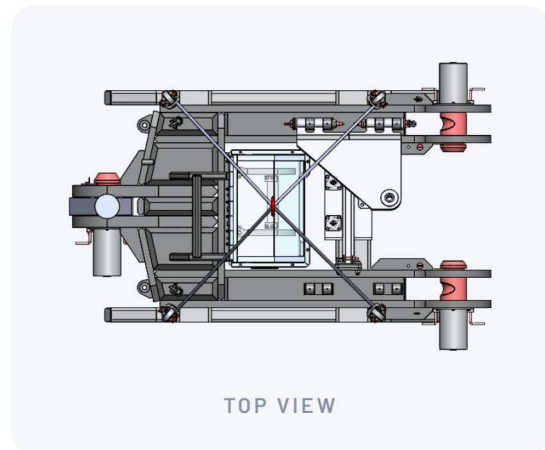

OPERATIONAL HIGHLIGHTS

- Ready for ultra-deepwater work
- E-frame swing arms for slickline and E-line
- Dual brake system with anti-two-block protection
- Designed and engineered to API 8C, DNV E-101 & DNV 2.7-3
- Engineered for minimal interference with ongoing operations