

UMBILICAL C-PLATE

Protects subsea umbilicals at the surface as they pass through the rig-floor rotary area, with controlled alignment through well center.



TOP VIEW

36-1/2"

OVERALL DIAMETER

14-1/2"

INTERNAL DIAMETER

25-3/4"

LOCKING PIN DIA.

19"

MIN. THRU-BORE

KEY FEATURES

Adjustable roller system

Configurable rollers accommodate varying umbilical ODs with smooth, controlled travel.

Quick locking installation


Locking pin design for efficient installation, positioning, and removal.

Surface umbilical protection

A dedicated protective interface through the rig-floor rotary area.

Accurate well-center placement

Swiveling lifting eyes assist controlled placement over well center.

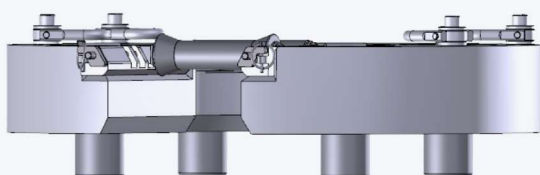

ROTARY BUSHING COMPATIBILITY

NOV MPCH Hinged Master Bushing

NOV MSPC Solid Master Bushing

NOV MBH 1250 with Drilling Bowl or LSB Landing String Bowl